





CYL4 is a patented innovation that allows this product to be keyed to door locks that use the most common key type (C4), thus providing you with the added convenience of having to use only one key around your home. Ask your retailer or locksmith for details.

- For timber or aluminium awning windows with hook hinges or non-friction stays.
- Handle can be folded away after use to limit obstruction to curtains and blinds.
- Low profile foldable handle winder.
- Can be locked opened or closed.
- Can be wound closed whilst locked.
- High Security sash fixing plate included.

## Installation Instructions

- With window closed, place winder on sill against sash.
  - Locate hooded sash bracket over chain sash plate and position in the centre of the sash. Mark hole centres.
- Important:**
- Ensure screws will clear glass line before drilling holes.
  - Drill 2 holes 9.0mm dia through sash.
  - Fix hooded sash bracket to security sash fixing plate with 28mm screws.

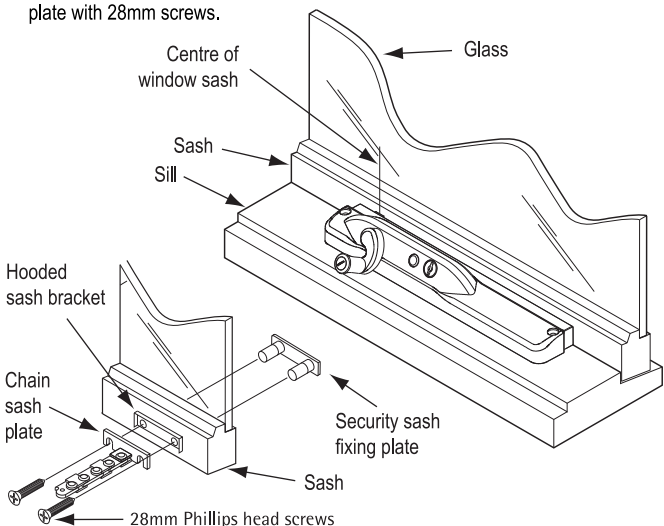


- With window closed temporarily locate chain sash plate into hooded sash bracket by loosening screws.
- Position winder on sill flush with sash or flyscreen and mark hole centres.
- Drill 2 holes 3.5mm dia in sill to suit screw length and secure winder with 50mm Phillips countersink head screws.
- Check operation and if satisfied replace 50mm countersink Phillips head screws with 50mm one way screws for greater security.

**Important:**

- One way screws cannot be removed once tightened.

**Note:**

Handle can be re-positioned if desired. Gently prise handle off with screwdriver ensuring that winder body is protected by a cloth. Handle can then be pushed back in a more convenient location.

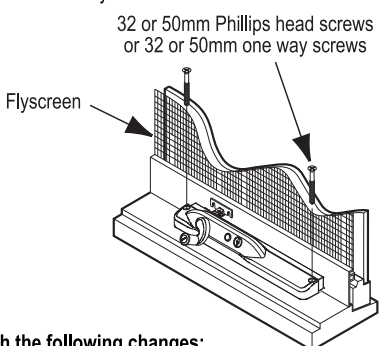

## Aluminium Windows

**Refer to the above instruction with the following changes:**

- If security sash fixing plate cannot be used, drill 2 holes 3.0mm dia and secure chain sash plate with 12mm countersink screws.
- To fix chainwinder to the sill, drill 2 holes 4.0mm dia and secure with 32mm thread cutting screws.
- Check operation and if satisfied replace 32mm Phillips head screw with the 32mm one way screws for greater security.

## TOOLS REQUIRED (Checklist)

- ☐ Pencil or marker
- ☐ Screwdrivers
- ☐ Drill
- ☐ 3.0mm drill bit
- ☐ 3.5mm drill bit
- ☐ 4.0mm drill bit
- ☐ 9.0mm drill bit

## PACK CONTENTS

- ✓ Lockable Window Winder x 1
- ✓ Hooded sash bracket x 2
- ✓ 12mm Phillips head screw x 2
- ✓ 28mm Phillips head screw x 2
- ✓ 32mm Phillips head screw x 2
- ✓ 32mm one way screw x 2
- ✓ 50mm Phillips head screw x 2
- ✓ 50mm one way screw x 2
- ✓ Keys x 2
- ✓ Security sash fixing plate x 1

## ASSA ABLOY

\*Refer to Whitco Warranty.

ASSA ABLOY Australia Pty Limited  
235 Huntingdale Road, Oakleigh VIC 3166  
ABN 90 086 451 907 ©2008  
Visit us at [www.whitco.com.au](http://www.whitco.com.au)

®Registered Trademark of ASSA ABLOY Australia Pty Limited  
Made in China to exclusive Whitco specifications and quality standards



# SELECTABLE CHAINWINDER OPENING (100mm and 150mm)

## FITTING INSTRUCTIONS

